SINUS UPS 500 + 26Ah (300W/500VA) EMERGENCY POWER SUPPLY [1,5M CABLE]

REGULAR RANGE


PRODUCT CODE
3SR500WA26

EAN
5904100450107

CATEGORY
Emergency power supply

SUBCATEGORY
SINUS UPS emergency power supplies (with battery)

PRODUCT PAGE
voltpolska.pl/produkty/sinus-ups-500-aku-26ah-300-500w-zasi...

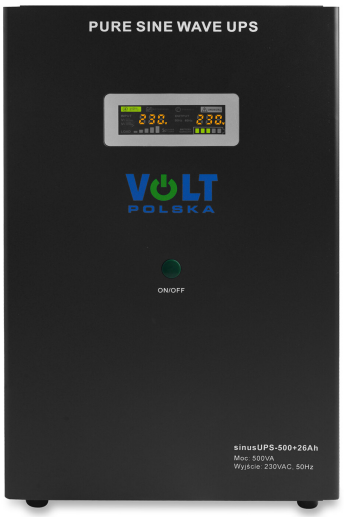

ABOUT THE PRODUCT

SINUS UPS 500 + 26Ah is a line-interactive emergency power supply designed for uninterrupted power supply to central heating systems, computers, servers, automatic gates and other devices requiring a pure sine wave. W the event of a mains voltage failure, 230VAC automatically switches to battery power.

W a single enclosure, it integrates a DC/AC inverter with a pure sine wave, an emergency switch UPS, a mains voltage stabiliser, a battery charger and a AGM 26Ah battery. The colour display enables monitoring of the device's most important operating parameters.

The power supply can operate with central heating pumps and boilers, solar systems, office equipment, lighting, consumer electronics and audio equipment, as well as inductive devices such as compressors, air conditioners, refrigerators and freezers. The 1,5 m cable facilitates connection of the device to the installation.

TECHNICAL SPECIFICATIONS

General Parameters	**Total power (□□ary)**	500VA
	Rated power (continuous)	300W
	No-load current (battery operation)	< 1A
	Mains/battery transfer time	< 4ms
Input Parameters (Mains)	**Input voltage**	150-270 VAC
	Input frequency	45-65 Hz

VOLT POLSKA Sp. z o.o.

ul. Świemirowska 3, 81-877 Sopot
NIP 5851458032 | REGON 221142660
KRS 0000372066


voltpolska.pl
(58) 500-85-62
hurt@voltpolska.pl
pomoc@voltpolska.pl


GENERATED: 2026-10-30 15:07

TECHNICAL SPECIFICATIONS - CONTINUED

Output Parameters (AC)	**Output voltage**	230 VAC ±1% in battery mode / 230 VAC ±8% in mains mode with AVR
	Output frequency	50 Hz ±0,5 Hz
	Output voltage waveform	Pure sine wave
	Waveform distortion (THD)	< 3%
Battery and Charging	**Built-in battery**	YES (26 Ah AGM)
	Battery voltage	12 VDC
	Maximum charging current	10A
Protection and Functions	**Protection**	Overload, overtemperature, overvoltage and undervoltage, battery discharge protection, short-circuit, overcharge protection
Operating Environment	**Operating temperature**	0 - 40 °C
Dimensions/Weight	**Device Dimensions**	419 x 290 x 159 mm
	Net weight	14,7 kg
	Individual package dimensions	365 x 220 x 500 mm
	Individual package weight	16 kg

PRODUCT GALLERY

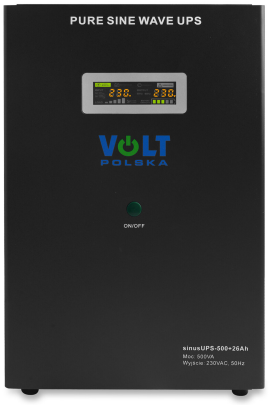

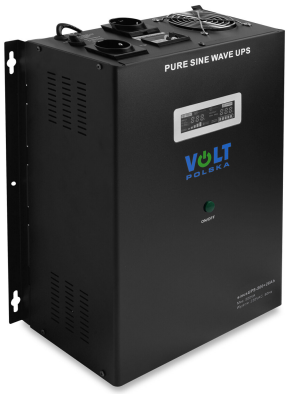

VOLT POLSKA Sp. z o.o.

ul. Świemirowska 3, 81-877 Sopot
NIP 5851458032 | REGON 221142660
KRS 0000372066

voltpolska.pl
(58) 500-85-62
hurt@voltpolska.pl
pomoc@voltpolska.pl

PRODUCT GALLERY - CONTINUED










PRODUCT GALLERY - CONTINUED

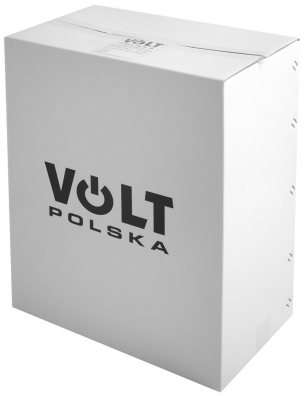

VOLT POLSKA Sp. z o.o.

ul. Świemirowska 3, 81-877 Sopot

NIP 5851458032 | REGON 221142660

KRS 0000372066

voltpolska.pl

(58) 500-85-62

hurt@voltpolska.pl

pomoc@voltpolska.pl

This datasheet was generated automatically; technical data and images are for reference only and may change without notice. To the extent permitted by law, VOLT POLSKA accepts no liability for any errors or inaccuracies in this datasheet.