MICROUPS 2000VA/1200W 2×9Ah EMERGENCY POWER SUPPLY [TOWER]

REGULAR RANGE

PRODUCT CODE
5UP2000029

EAN
5903111886875

CATEGORY
Emergency power supply

SUBCATEGORY
MICRO UPS emergency power supplies (computer power supplies with battery)

PRODUCT PAGE
voltpolska.pl/produkty/micro-ups-2000-2x9ah-1200-2000w-ko...



ABOUT THE PRODUCT

Micro UPS 2000 2x9Ah is an emergency power supply using Line-Interactive technology, intended to power computers and peripheral devices. The compact housing and low weight make the device suitable for use in small office spaces. The built-in AVR voltage stabiliser protects connected devices against sudden voltage spikes, while the cold-start function enables the power supply to be started without a direct connection to the mains AC.

The power supply is equipped with three 230V power sockets, a AGM 2x9Ah battery, overload protection and an automatic energy-saving function. It works with the free ViewPower software, which enables connection to a computer via USB, monitoring and changing operating parameters, configuring messages and setting alarms.

Micro UPS 2000 2x9Ah can power computers, laptops, small servers, workstations, network devices and peripherals, consumer electronics devices, alarm and CCTV systems, telecommunications and fiscal devices, and control-measurement equipment. Protection against low and high voltage, short circuits, overloads and overheating supports safe operation.

In W mains mode, the power supply supports the full load 100%. During battery emergency operation, the recommended load is 50-75% of the rated power; connecting devices with full power 100% causes the immediate shutdown of UPS-a. The current software for control and parameter monitoring is available at: https://voltpolska.pl/soft_ups.zip

TECHNICAL SPECIFICATIONS

General Parameters	**Continuous power**	1200W
	Total power (instantaneous)	2000VA
	Efficiency	~ 90%
	Mains/battery transfer time	~ 3 ms
Input Parameters (Mains)	**Input voltage**	170 - 280 VAC
	Input voltage range	170 - 280 VAC

VOLT POLSKA Sp. z o.o.

ul. Świemirowska 3, 81-877 Sopot
NIP 5851458032 | REGON 221142660
KRS 0000372066

voltpolska.pl
(58) 500-85-62
hurt@voltpolska.pl
pomoc@voltpolska.pl

GENERATED: 2026-10-30 16:03

TECHNICAL SPECIFICATIONS - CONTINUED

Output Parameters (AC)	**Frequency**	50/60 Hz +- 1Hz
	Voltage waveform	Approximated sine wave
	Output voltage range	with AVR - 210 - 248 VAC +- 3%
Battery and Charging	**Type / Capacity**	2x9Ah
	Charging time	6-8 hours to 90%
Indicators and Alarms	**AC mode (mains)**	The AC MODE icon illuminates on the display
	DC mode (battery-powered)	The BATT. MODE icon illuminates on the display
	Fault mode	The FAULT icon illuminates on the display
	Alarm: Backup mode	Signal every 10 s
	Alarm: Low battery charge	Signal every 1 s
	Alarm: Overload	Signal every 0,5 s
	Alarm: Error	Continuous signal
Protection and Operating Environment	**Full protection**	Overload, overcharge and discharge protection
	Operating temperature	0 - 40 C
	Noise level	< 40 dB
General Data and Installation	**Device dimensions**	370 x 135 x 165 mm
	Net weight	11,2 kg
	Individual package dimensions	470 x 195 x 255 mm
	Individual package weight	11,8 kg

VOLT POLSKA Sp. z o.o.

ul. Świemirowska 3, 81-877 Sopot

NIP 5851458032 | REGON 221142660

KRS 0000372066

voltpolska.pl

(58) 500-85-62

hurt@voltpolska.pl

pomoc@voltpolska.pl

PRODUCT GALLERY









PRODUCT GALLERY - CONTINUED



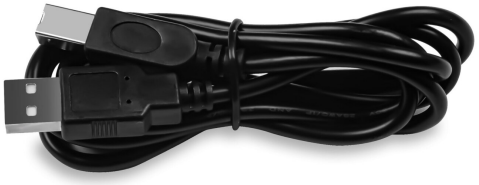



VOLT POLSKA Sp. z o.o.

ul. Świemirowska 3, 81-877 Sopot

NIP 5851458032 | REGON 221142660

KRS 0000372066

voltpolska.pl

(58) 500-85-62

hurt@voltpolska.pl

pomoc@voltpolska.pl

This datasheet was generated automatically; technical data and images are for reference only and may change without notice. To the extent permitted by law, VOLT POLSKA accepts no liability for any errors or inaccuracies in this datasheet.